



Accessories


Unshielded CAT6 U/UTP CAT6 Lan Cable

ELECTRICAL CHARACTERISTICS(20°C)

- Max. Conductor DC Resistance (Ω /km): #23:140
- Min. Insulation Resistance (Ω /km): PE:100M
- Dielectric Strength: AC-500V/1Min
- Impedance: 100 \pm 15 Ω
- DC Resistance max. Ω /1000ft: 28.6
- DC Resistance Unbalance of a pair: 5% max
- Propagation Delay Skew: 45ns/100m

SPECIFICATIONS

Type		U/UTP CAT6 4*2*23AWG LSZH	
Structure		Structure A	
Conductors	Structure AWG	AWG	23
	Material	----	Solid CCA
	Diameter	mm	\emptyset 0.57+/-0.008
Insulation	Material	----	HDPE
	Diameter	mm	\emptyset 1.03+/-0.05
	Average Thickness	mm	0.212+/-0.05
Shielding1	Type	----	----
Assembly	Direction	----	S
	No. of Insulations	Pair	4
Shielding2	Material	----	----
Shielding3	Shield	----	----
Jacket	Material	----	LSZH (CPR E)
	Diameter	mm	\emptyset 6.2+/-0.2
	Average Thickness	mm	0.55+/-0.1
	Flame Rate	----	----
	Color	----	Gray
Jacket marking	Air Space CCTV UTP CAT-6 4PAIR 23AWG ISO/IEC 11801 ANSI/TIA/EIA 568A/B LSZH 001 002 ..		

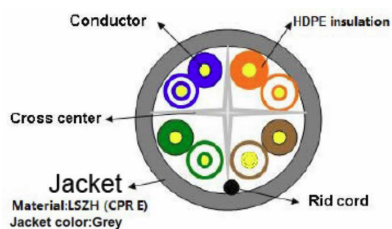

Core:

- P1: White-Blue/Blue
- P2: White-Orange/Orange
- P3: White-Green/Green
- P4: White-Brown/Brown